


## CASA ROLLO

With the roller shutter control, shutters, blinds or awnings can be controlled or operated by push-button or app.

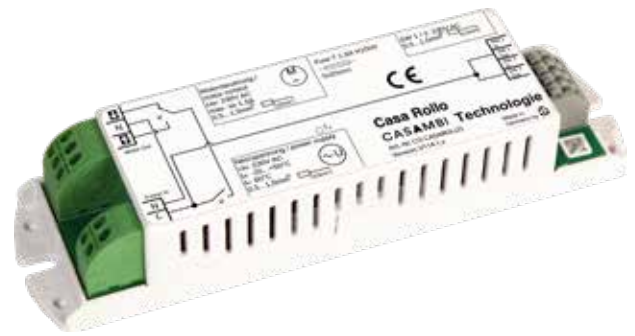


## TECHNICAL DATA

ART.-NO. **CO-CASAROLLO**

Electrical data	
Input voltage	230 V AC
Power frequency	50/60 Hz
Maximum motor power	345 VA
Standby	0,15 W
Terminal cross section	max. 1,5mm <sup>2</sup>
Cycles of operation	50.000
Appliance	inductive load (motor)
Push button connection	2
Temperature range in use	-20 C° - +50 C°
Certifications	
Certificates	CE, RoHS
Protection class	IP20
Dimensions / Material	
Size	143 x 38 x 27mm
Material	Plastic
Max. body temperature	60° C
Storage temperature	-25 C° - +75 C°

## CONNECTION PLAN

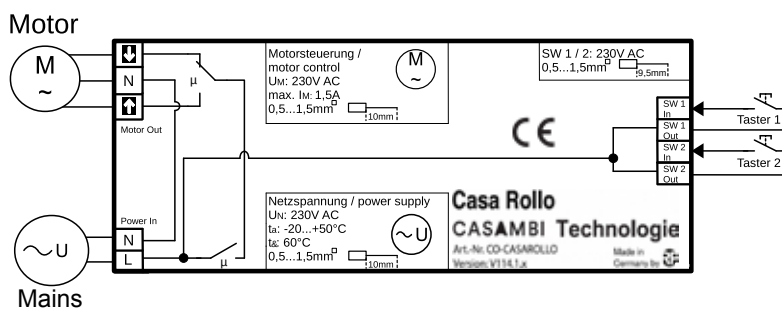

### NOTE

Subject to technical changes and printing errors.  
Installation only by an experienced technician.