

MOJOVA SILIKONI-LED-NAUHA SIDE 8×16MM 24V 12W RGB IP67 5M


Tekniset tiedot

Tuotenumero 91012509

Sähkönumero 4159850

Teho	12W/M t
Käyttöjännite	DC24V
CRI	-
LED määrä	120LEDs/M
Rullan pituus	5M
Käyttölämpötila	-25-60°C
Varastointilämpötila	-30-80°C

- Kolmelta sivulta valaiseva, leveä valonjako, tasainen ja pisteetön valo
- Sivusuunnassa taivutettava
- Silikonikuori
- UV suojattu
- Leikattava

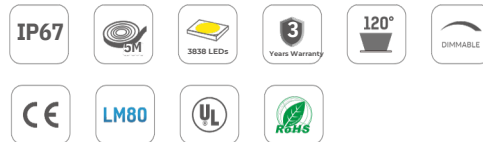



Valoteho

Väri	
• R	43lm
• G	122lm
• B	26lm

Valonjako

Valovoimakkuuden
jakautumiskäyrä

CO PLANE ISOLUX
DIAGRAM (UNIT:lx)

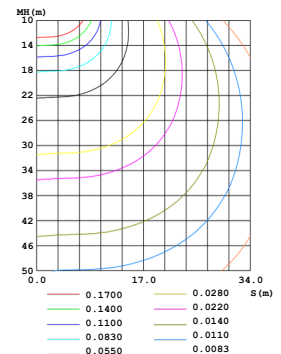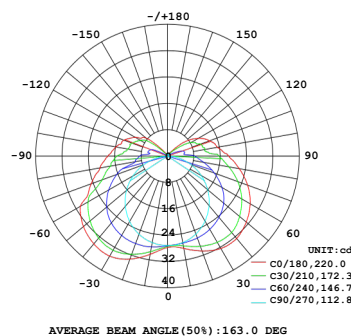


KVS Oy
Yrittäjätie 6
60100 Seinäjoki



KVS store

myynti@kvsoy.fi
kvsstore.fi
044 972 6962


Mitat Dimension




RGB



* Optional waterproof head, this picture is for reference only.

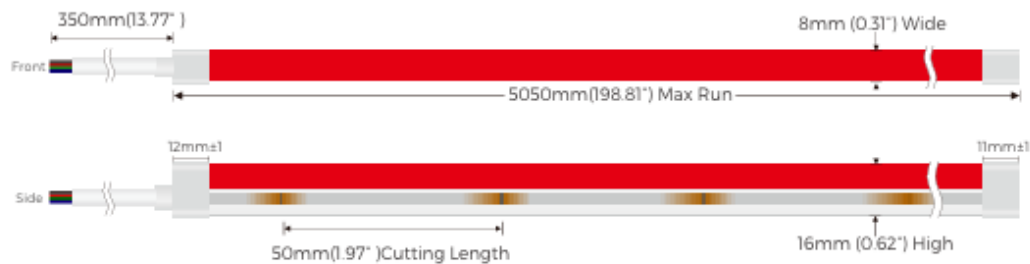

Kytäentäkaavio

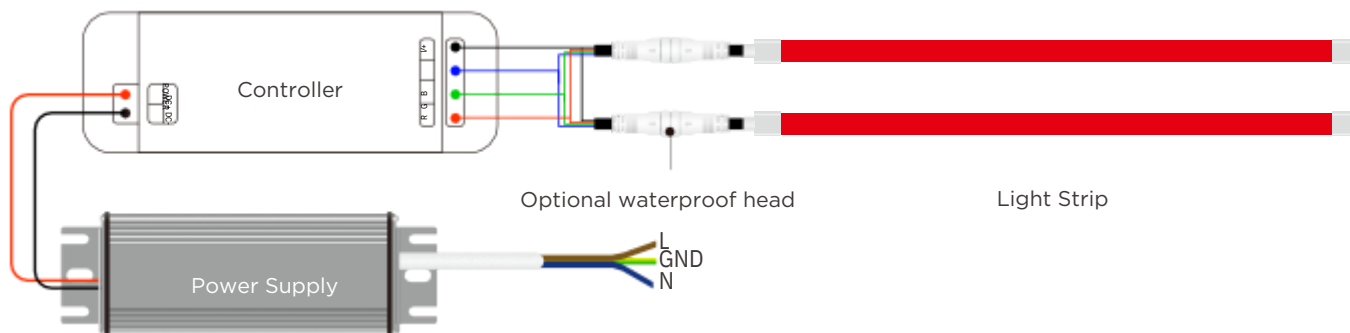

KVS Oy
Yrittäjätie 6
60100 Seinäjoki




KVS store

myynti@kvsoy.fi
kvsstore.fi
044 972 6962

Asennus

① Clip


Fix the clips and aluminum profile via the screws.

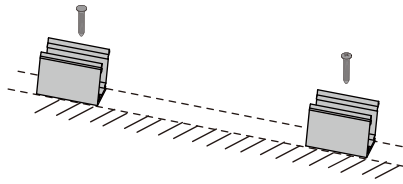


⚠ Suggestion: 2pcs clips per meter.

② Neon Series

Simultaneously install the neon from both ends.




Should use tools to assist when remove the neon.

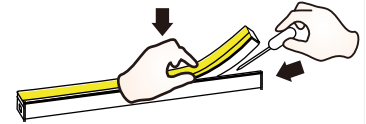


Cutting

① Cut the neon to be required length




⚠ The minimum cutting unit is based on the cutting mark.

② Cut the side of neon, expose the soldering pad




Soldering

① Solder the cable onto the PCB




② Put the wire into and inject glue into the end cap



⚠ The amount of glue is about 1/3-1/2 of end cap.


Install end cap

① Push the end cap to wrap end of neon



⚠ After the glue is injected, the neon needs to be laid flat for 2 hours to before other process.

② Apply gel around the tail of neon and install the end cap



⚠ After the glue is injected, the neon needs to be laid flat for 2 hours to before project process. Glue will complete dry after 24hours.

