



FleXity

Tiny post-top lantern offering comfort and performance

- Available with opal diffuser for comfortable lighting or clear enclosure for best performances
- Respectful of its environment with zero upward lighting with clear enclosure
- Choice of dimming options and controls to reduce energy consumption: DALI2, Bi-power
- Zd4i certified on request
- Ease of installation thanks to very low weight and pre-wiring



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

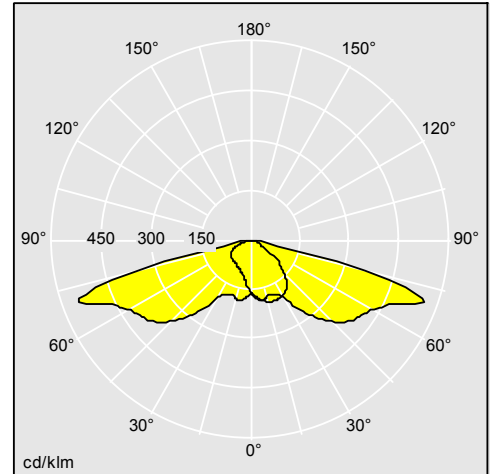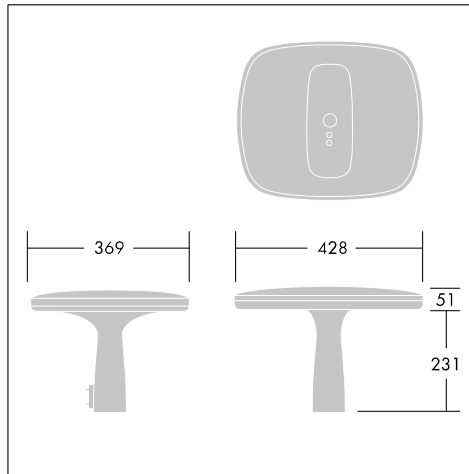

96270788

Material/Finish

Canopy and base die cast aluminium (AS9U3, LM24 equivalent, EN AC-47100, standard corrosion class C3).

Diffuser: clear UV stabilised PC

Screw fixings: stainless steel

Finish: texturised anthracite (close to RAL7043), Choice of RAL colors via the configurator.

Installation/Mounting

Suitable for mounting on column Ø76mm or Ø60mm, spigot internal length: 75mm. Recommended height: 3/6m. Equipped with cable gland or pre-wired with HO7RNF cable. Spare driver available. Delivered ready to install, complete with factory fitted integral gear tray, all supplied in a single carton.

Specification

To specify state:

A low weight post-top decorative lantern with 2 different enclosures : one opal for diffused light and comfort, one with clear enclosure for performance and no upward lighting emission: ULOR 0. A choice of optics, controls and connectivity with Zhaga interface addressing urban applications like parks, plazas and residential streets.

As Thorn FleXity.

FleXity

Ordering Guide Supplied complete with LEDs

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
FleXity, diffuse optic, 250mA				
<FLEX 24L25-730 OP CL2 W5 T60 ANT	LED		4,5	96270771
<FLEX 24L25-740 OP CL2 W5 T60 ANT	LED		4,5	96270772
FleXity, wide street comfort optic, symmetric, 250mA				
<FLEX 24L25-730 WSC-S CL2 W5 T60 ANT	LED		4,5	96271205
<FLEX 24L25-740 WSC-S CL2 W5 T60 ANT	LED		4,5	96271206
<FLEX 24L25-730 WSC-S CL1 W5 T60 ANT	LED		4,5	96271207
<FLEX 24L25-740 WSC-S CL1 W5 T60 ANT	LED		4,5	96271208
<FLEX 24L25-730 WSC-S CL1 W5 T76 ANT	LED		4,7	96271211
<FLEX 24L25-740 WSC-S CL1 W5 T76 ANT	LED		4,7	96271212
FleXity, wide street comfort optic, symmetric, 500mA				
<FLEX 24L50-730 WSC-S CL2 W5 T60 ANT	LED		4,5	96270773
<FLEX 24L50-740 WSC-S CL2 W5 T60 ANT	LED		4,5	96270774
<FLEX 24L50-730 WSC-S CL1 W5 T60 ANT	LED		4,5	96270777
<FLEX 24L50-740 WSC-S CL1 W5 T60 ANT	LED		4,5	96270778
<FLEX 24L50-740 WSC-S CL2 W5 T76 ANT	LED		4,7	96270782
FleXity, wide street comfort optic, symmetric, 700mA				
<FLEX 24L70-740 WSC-S CL2 W5 T60 ANT	LED		4,5	96276297
<FLEX 24L70-740 WSC-S CL1 W5 T60 ANT	LED		4,5	96277178
FleXity, wide street comfort optic, symmetric, 1050mA				
<FLEX 24L105-730 WSC-S CL1 W5 T76 ANT	LED		4,7	96271121
<FLEX 24L105-730 WSC-S CL2 W5 T60 ANT	LED		4,5	96271109
<FLEX 24L105-740 WSC-S CL2 W5 T60 ANT	LED		4,5	96271110
<FLEX 24L105-740 WSC-S CL2 W5 T76 ANT	LED		4,7	96271114
<FLEX 24L105-740 WSC-S CL1 W5 T60 ANT	LED		4,5	96271118
FleXity, wide street comfort optic, asymmetric, 250mA				
<FLEX 24L25-730 WSC CL2 W5 T60 ANT	LED		4,5	96271221
<FLEX 24L25-740 WSC CL2 W5 T60 ANT	LED		4,5	96271222
<FLEX 24L25-730 WSC CL1 W5 T60 ANT	LED		4,5	96271223
<FLEX 24L25-740 WSC CL1 W5 T60 ANT	LED		4,5	96271224
<FLEX 24L25-730 WSC CL2 W5 T76 ANT	LED		4,7	96271225
<FLEX 24L25-740 WSC CL2 W5 T76 ANT	LED		4,7	96271226
<FLEX 24L25-730 WSC CL1 W5 T76 ANT	LED		4,7	96271227
<FLEX 24L25-740 WSC CL1 W5 T76 ANT	LED		4,7	96271228
FleXity, wide street comfort optic, asymmetric, 500mA				
<FLEX 24L50-730 WSC CL2 W5 T60 ANT	LED		4,5	96270787
<FLEX 24L50-740 WSC CL2 W5 T60 ANT	LED		4,5	96270788
<FLEX 24L50-730 WSC CL1 W5 T60 ANT	LED		4,5	96270789
<FLEX 24L50-740 WSC CL1 W5 T60 ANT	LED		4,5	96270790

FleXity

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
<FLEX 24L50-730 WSC CL1 W5 T76 ANT	LED		4,7	96270793
<FLEX 24L50-740 WSC CL1 W5 T76 ANT	LED		4,7	96270794
FleXity, wide street comfort optic, asymmetric, 1050mA				
<FLEX 24L105-730 WSC CL2 W5 T60 ANT	LED		4,5	96271125
<FLEX 24L105-740 WSC CL1 W5 T76 ANT	LED		4,7	96271138